
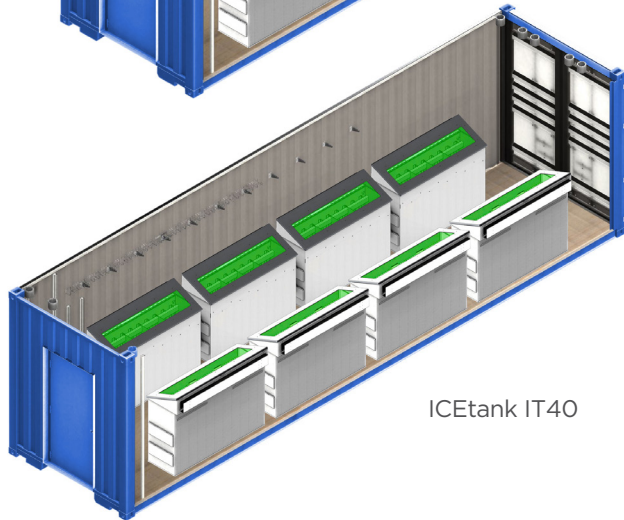


ICEtank IT20

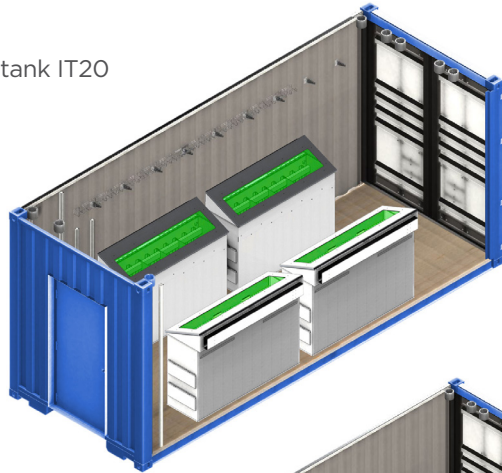

ICEtank IT40

Modularized, Immersion-Cooled Data Center

Quick Deployment in Any Environment

Product Specifications

	IT20	IT40
Number of Immersion-Cooled Racks	4 x 42U	8 x 42U
Number of Coolant Distribution Units (CDU)	1	2
Chillerfree, Warm Water Operation (95° F) Cooling Capacity/Per Rack Density	100 kW/25 kW ¹	200 kW/25 kW ¹
PUE	1.03 to 1.09	1.03 to 1.09
Redundancy ²	Coolant Pumps: 2N, Control System: 2N	
Dimensions (l x b x h)	20' ISO shipping container: 20' x 8' x 9'6"	40' ISO shipping container: 40' x 8' x 9'6"
Approximate weight (not including IT)	25,000 lbs	42,000 lbs

Delivery & Installation

Shipping Lead Time	• 12 to 14 weeks after receipt of purchase order
Shipping Terms	• Ex Works
Installation	• Seven to ten days for the first unit, plus five to eight days for every subsequent unit. GRC service engineer(s) will be onsite to perform installation and training.



Power & Water Specifications

Final Heat Rejection ³	Cooling Towers/Hybrid Coolers
Water Usage-Estimated	1-2 gpm (standard garden hose)
Power Requirements	3-phase 380 to 480 VAC, 50 to 60 Hz

Infrastructure / Site Requirements

- Access to power
- Access to water (not needed for dry cooler variants)
- Grade level concrete pad

Features & Options

- Fire suppression
- Air conditioning for technician comfort
- Complete electrical infrastructure with breakers, panels, and power distribution
- Physical security options: Key lock, biometric, or access card
- Backup Power: Standalone UPS and diesel generator modules available

Monitoring and Reporting

Platform	Foresight DCIM: Proprietary, web-based remote/local monitoring and reporting system
Alerts	Configurable email alerts
DCIM / BMS Integration Protocols	BACNET & SNMP
Data Measurements	<ul style="list-style-type: none"> - Heat load - Coolant pressure - Pump speed - Operating temperatures - water and coolant - Operating pressures - water and coolant - Rack temperature - multiple locations - Power consumption - Liquid level - multiple locations - System health, diagnostics, and early fault detection

Warranty⁴

- One-year limited warranty including:
 - 24/7 on-call GRC support staff
 - 24/7 remote monitoring
 - Domestic (US): Three business-day onsite response with parts and labor
 - International: Parts by mail
 - Regular maintenance as required



The Immersion Cooling Authority

11525 Stonehollow Drive, Suite A-150 Austin, TX 78758
512.692.8003 • info@grcooling.com • grcooling.com

³Zero water use options available in climates where the design dry bulb temperature does not exceed 90°F/35°C. Additional costs apply.

⁴Warranty is void if the IceTank units are run outside of their operating parameters defined in the installation specification.

GRC believes the information in this Data Sheet to be accurate; however, GRC does not make any representation or warranty, express or implied, as to the accuracy or completeness of any such information and shall have no liability for the consequences of the use of such information.

This Data Sheet and its contents do not constitute an order by GRC to sell any product. An order is made only by a quotation provided by GRC. The terms of sale in such quotation may vary from those set forth in this Data Sheet. GRC's acceptance of any order shall be in GRC's sole discretion, and all quotations and sales are subject to GRC's Terms and Conditions of Commercial Sale.